

MR-70 UHF RX Multicoupler

Receiver Multicoupler UHF 380 - 475 MHz


Scan Antenna MR-70 Receiver Multicoupler series comes as 2, 3, 4, 6 or 8 channels with a bandwidth of 5 MHz (adjustable).

- Splitter and filter based design with high isolation between receivers.
- Enables using more receivers with only one common antenna, with isolated inputs.
- Standard EIA 19" tray, 300 mm (1HU).



ELECTRICAL SPECIFICATIONS

| | |
|------------------------------|------------------------------|
| Type | VHF - Reception Multicoupler |
| Channels | 2, 3, 4, 6 or 8 |
| Frequency | 380 - 475 MHz |
| VSWR | ≤ 1.5:1 |
| Impedance | 50 Ohm |
| Bandwidth | 5 MHz |
| LNA gain | 20 dB (approx.) |
| Noise Figure | < 2.0 dB |
| Max. Input Power | +12 dBm |
| Supply voltage | 230/110 V |
| Current Consumption, Average | 120 mA |

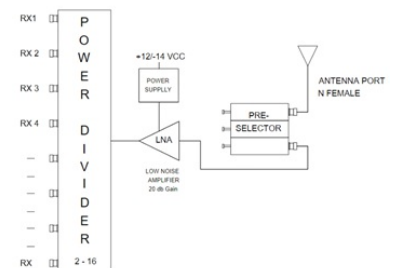

Datasheet

2 / 2

MECHANICAL SPECIFICATIONS

| | |
|-----------------------|--|
| Color | Black Grey (RAL7021) |
| Dimensions | 1 HU: 482.6 x 44.5 x 300 mm (W x H x L) |
| Weight | MR-702: 2.5 kg MR-703: 2.6 kg MR-704: 2.8 kg |
| Operating temperature | -20 to +60°C |
| Connector | Type N-female |
| Serial no. | On product label |

ORDERING INFORMATION

| | |
|--------|---------------------------------------|
| MR-702 | 2CH UHF Multicoupler 380-475 MHz 1HU |
| MR-703 | 3 CH UHF Multicoupler 380-475 MHz 1HU |
| MR-704 | 4 CH UHF Multicoupler 380-475 MHz 1HU |
| MR-706 | 6 CH UHF Multicoupler 380-475 MHz 1HU |
| MR-708 | 8 CH UHF Multicoupler 380-475 MHz 1HU |