

# HCMR450-3

## Hybrid 3 channel UHF TX/RX Combiner


HCMR450-3 series are a combined UHF TX/RX hybrid combiner with single or dual isolators used with two antennas. One RX and one TX or to be used with external duplex filter.

- Standard EIA 19" tray, 400 mm (2HU)
- Tuned to customer specified frequencies.
- Built-in low pass filter.
- Max power 100W as standard.



## ELECTRICAL SPECIFICATIONS

Type	Hybrid 3 channel UHF TX/RX Combiner
Frequency	T: 380 - 420 MHz L: 400- 440 MHz H: 440 - 475 MHz
VSWR	≤ 1.5:1
Impedance	50 Ohm
Max. Input Power	100 Watts (Per channel)
Insertion Loss (TX)	Single Isolator: < 5.8 dB Dual Isolator: < 6.1 dB
Isolation TX - TX	Single Isolator: > 50 dB Dual Isolator: > 70 dB
Isolation RX-RX	>20 dB
Bandwidth (RX)	Approx. 5 MHz (Adjustable in band)
Gain	RX: 20±1.0 dB
LNA Noise Figure	< 2.0 dB
Power Supply	100-240 V; 50/60 Hz (Max. 7W)

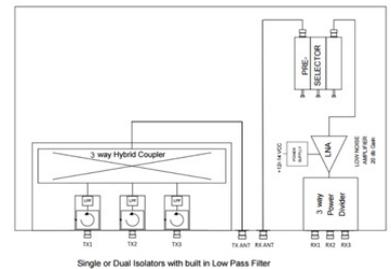

## Datasheet

2 / 2

## MECHANICAL SPECIFICATIONS

Color	Black gray (RAL7021)
Dimension	482.6 x 89.0 x 400 mm (W x H x L)
Weight	HCMR450-3S: 6.4 kg HCMR450-3D: 7.0 kg
Connector	Type N-female
Serial no.	On product label
Operating temperature	-20° to +60°C

## ORDERING INFORMATION

55430-003T	HCMR450-3ST 380-420 MHZ 3CH x 100 W Single Isolator 2HU
55430-103T	HCMR450-3DT 380-420 MHZ 3CH x 100 W Dual Isolator 2HU
55430-003L	HCMR450-3SL 400-440 MHZ 3CH x 100 W Single Isolator 2HU
55430-103L	HCMR450-3DL 400-440 MHZ 3CH x 100 W Dual Isolator 2HU
55430-003H	HCMR450-3SH 440-475 MHZ 3CH x 100 W Single Isolator 2HU
55430-103H	HCMR450-3DH 440-475 MHZ 3CH x 100 W Dual Isolator 2HU
Note	Power cable is not included