Datasheet

CR-2-150

VHF 134 - 174 MHz 150 Watts Single Cavity reject Filter

- For use in repeaters and full duplex radios.
- Single cavity.
- Easy tuning.

ELECTRICAL SPECIFICATIONS

Туре	VHF - Cavity reject filter
Frequency	134 - 174 MHz
Maximum Input Power	150 Watts
Insertion loss	0.5 - 2.0 dB (1.0 dB @ 1.0 MHz spacing)
Attenuation	See diagram
VSWR	≤ 1:1.5
Impedance	50 Ohm
Frequency Stability	9 ppm/°C (approx.)



MECHANICAL SPECIFICATIONS

Color	Black Grey (RAL7021)
Dimension	15 x 15 x 60 cm
Weight	7.0 kg
Operating Temperature	-30°C to +60°C
Connector	Type N-female
Serial no.	On product label

ORDERING INFORMATION

CR-2-AQ


Not tuned In Box

SCAN ANTENNA A/S | LITERBUEN 15 | 2740 SKOVLUNDE | DENMARK | +45 +454333 1620 Disclaimer: Here you find all products for a complete antenna system. One-stop supplier with focus on high quality products produced in EU. No matter which type of antenna you are searching for, you will find it here. Every effort has been made to ensure the accuracy of the information in this product sheet. Scan Antenna reserves the right to introduce changes to this information without notice. All rights reserved.

Printed: 8/20/2025

Scan-Antenna®

Datasheet

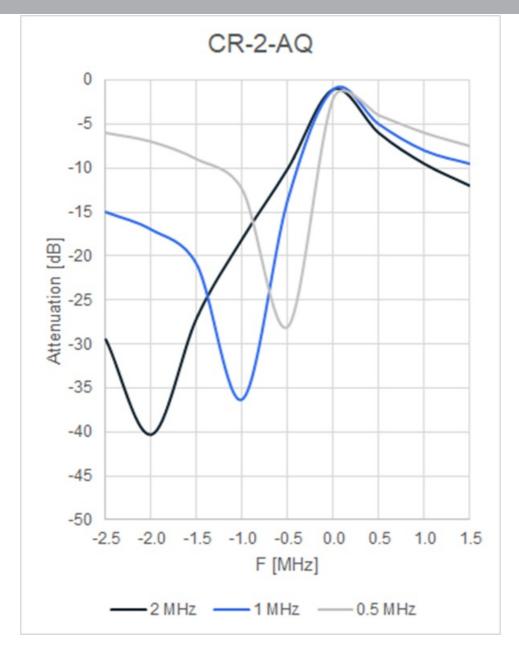

SCAN ANTENNA A/S | LITERBUEN 15 | 2740 SKOVLUNDE | DENMARK | +45 +454333 1620 Disclaimer: Here you find all products for a complete antenna system. One-stop supplier with focus on high quality products produced in EU. No matter which type of antenna you are searching for, you will find it here. Every effort has been made to ensure the accuracy of the information in this product sheet. Scan Antenna reserves the right to introduce changes to this information without notice. All rights reserved.