


HCMR150-3-DUPT

Hybrid 3 channel VHF TX/RX Combiner and Duplex Filter HS

HCMR150-3-DUPT series is a VHF TX/RX hybrid combiner and duplexer with single or dual isolators used for combining 3 VHF transceivers into one antenna with close frequency spacing.

- Standard EIA 19" trays. Two of 2HU, 400 mm depth.
- Tuned to customer specified frequencies, need to be specified when ordering.
- Full bandwidth.
- 100 W power handling.
- Combiner with high spec. external duplexer.

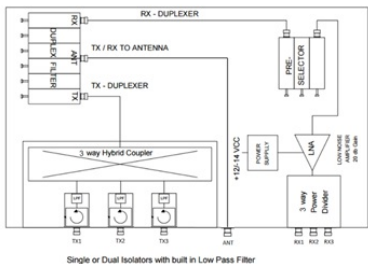

ELECTRICAL SPECIFICATIONS

Type	Hybrid 3 channel VHF TX/RX Combiner and Duplex Filter HS
Frequency	144 - 162 MHz 158 - 175 MHz
VSWR	≤ 1.5:1
Impedance	50 Ohm
Max. Input Power	100 Watts (Per channel)
Insertion Loss	Single isolator: < 6.9 dB Dual isolator: < 7.2dB
TX-TX spacing	DUPT-5: ≤ 1.5 MHz DUPT-10: ≤ 2.0 MHz
TX-RX spacing	DUPT-5: 4 - 7 MHz DUPT-10: 8 - 12 MHz
Isolation RX-TX	TX-TX spacing < 0.4 MHz :> 90dB TX-TX spacing < 2.0 MHz :> 70dB
Isolation TX-RX	RX-RX spacing < 0.4 MHz :> 90dB RX-RX spacing < 2.0 MHz :> 70dB
Isolation TX - TX	Single isolator: > 50 dB Dual isolator: > 70 dB
Isolation RX-RX	> 20 dB
Bandwidth (RX)	Approx. 3 MHz (in band)
Gain	RX: 20±1.0 dB
LNA Noise Figure	< 2.0 dB
Power Supply	100-240 V; 50/60 Hz (Max. 7W)

Datasheet

MECHANICAL SPECIFICATIONS

Color	Black Grey (RAL7021)
Dimension	Two units: 482.6 x 89.0 x 300 mm (W x H x L)
Weight	Single Isolator: 9.3 kg Dual Isolator: 10.5 kg
Connector	Type N-female
Serial no.	On product label
Operating temperature	-20° to +60°C

ORDERING INFORMATION

55132-113	HCMR150-3S-L-5-150 144-162 MHZ 3CH x 100 W Single Isolator + DUPT-5 2 x 2HU
55134-123	HCMR150-3S-L-10-150 144-162 MHZ 3CH x 100 W Single Isolator + DUPT-10 2 x 2HU
55132-133	HCMR150-3S-H-5-150 158-175 MHZ 3CH x 100 W Single Isolator + DUPT-5 2 x 2HU
55134-143	HCMR150-3S-H-10-150 158-175 MHZ 3CH x 100 W Single Isolator + DUPT-10 2 x 2HU
55132-153	HCMR150-3D-L-5-150 144-162 MHZ 3CH x 100 W Dual Isolator + DUPT-5 2 x 2HU
55134-163	HCMR150-3D-L-10-150 144-162 MHZ 3CH x 100 W Dual Isolator + DUPT-10 2 x 2HU
55132-173	HCMR150-3D-H-5-150 158-175 MHZ 3CH x 100 W Dual Isolator + DUPT-5 2 x 2HU
55134-183	HCMR150-3D-H-10-150 158-175 MHZ 3CH x 100 W Dual Isolator + DUPT-10 2 x 2HU
Power	Cable not included