

Datasheet

1 / 1

CH-702


UHF 2 channel Hybrid Combiner

UHF Hybrid Combiner series covering 380 - 470 MHz by two models.

- Combining two transmitters on one antenna.
- No tuning required. Full bandwidth. For each model.

ELECTRICAL SPECIFICATIONS

Type	UHF 2 Channel Hybrid Combiner
Frequency	CH-702/T: 380 - 430 MHz CH-702: 400 - 470 MHz
VSWR	≤ 1.25:1
Impedance	50 Ohm
Max. Input Power	100 Watts (Per channel)
Insertion Loss	≤ 3.5 dB
Isolation TX-TX	≥ 23 dB

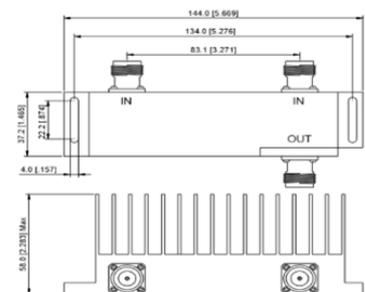

MECHANICAL SPECIFICATIONS

Color	Black
Weight	0.5 kg
Connector	Type N-female
Dimension	144 x 58 x 74 x mm (W x H x L)
Serial no.	On product label
Operating Temperature	-20° to +60°C

ORDERING INFORMATION

CH-702T	380-430 MHz 2 CH Hybrid Combiner
CH-702	400-470 MHz 2 CH Hybrid Combiner