

# WGPS-70G Series

## UHF (325 - 500 MHz) 3 dBd Mobile Whip


The WGPS-70G series offers two high gain whip antennas to be used for the UHF band, specifically 325 - 500 MHz.

All antenna whips are made of stainless steel, black chromed to withstand the harshest conditions.

- WGPS-70G - 5/8 λ antenna whip
- WGPS-70GR - 5/8 λ antenna whip with adjustable tilt

### ELECTRICAL SPECIFICATIONS

Type	Whip antenna (5/8 λ)
Frequency	325 - 500 MHz
Bandwidth	3% of f.res (VSWR ≤ 1.5:1)
VSWR	≤ 1.3:1 @ f.res
Impedance	50 Ohm
Polarisation	Vertical
Gain	3 dBd, 5.15 dBi
Max. Input Power	150 W

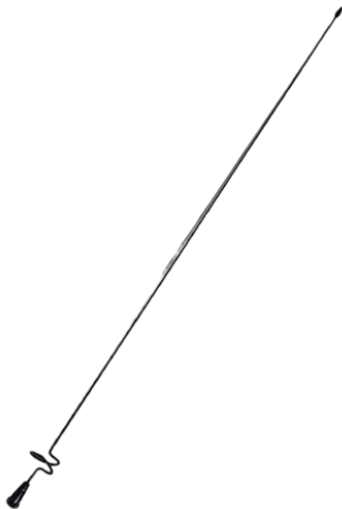

### MECHANICAL SPECIFICATIONS

Color	Black
Length	Max. TBC mm
Weight	Max. TBD
Mounting	On BA-GPS base - 8 mm
Mounting Place	Vehicle roof (Metalic surface)
Mounting Instructions	Antenna Whip must be cut to specified frequency.
Materials	Black chromed SS
Operating Temperature	-40 to +70°C
Connector	UNF 5/16-24 Thread

Datasheet

ORDERING INFORMATION

WGPS-70G	5/8 λ Whip
WGPS-70GR	5/8 λ Whip with adjustable tilt

PACKAGING INFORMATION

Type	In Bag
------	--------

