

BASE1301-X VHF BA Omni (Base Antenna)

3 dBd Gain Base Station Antenna for 150 MHz band

This meticulously constructed VHF 150 MHz omni-directional Base Station antenna with multipurpose mounting bracket (G1"-11 thread) antenna, can be used with revolving Nut Kit or with incl 10000-183 bracket.

Comes with a generous bandwidth which reduces the need for multiple antennas both in stock and on installation sites.

- High power antenna design
- Customer specified center frequency X version
- No groundplane needed

ELECTRICAL SPECIFICATIONS


Frequency	118 - 174 MHz
Bandwidth	Approx. 5 % of the specified Centre Frequency (CF)
Antenna Type	Half Wave Dipole
Impedance	50 Ohm
Vswr	<1.5:1
Polarisation	Vertical
Gain	3 dBd, 5.1 dBi,
Half Power Beamwidth	30°
Max. Input Power	150 W
Antistatic Protection	Direct Ground



Datasheet

MECHANICAL SPECIFICATIONS

Color	White and Chrome
Length	See Outline Drawing
Weight	Max. 1.7 kg
Mount type	incl. 10000-183 bracket (On 1" threaded pole (G1"-11 thread))
Mounting Place	On Tube (Ø 30 - 60 mm, vertical or horizontal) or Wall mount (mounting hole distance 68.5 mm).
Materials	Antenna: Brass, Copper, Fibreglass and Aluminium. Mounting Kit: Stainless steel A4 (AISI-316)
Survival Wind Speed	55 m/s
Operating Temperature	-55C to +70C (IEC 60068-2-1, IEC 60068-2-2)
Connector	N-female
Ingress Protection	IP66
Vibration	IEC 60068-2-6, IEC 60068-2-64
Serial no.	On product label

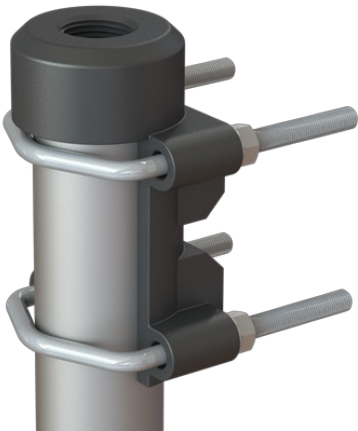

ORDERING INFORMATION

21310-005X	118-174 MHz (incl 10000-183 bracket) CF
------------	---

PACKAGING INFORMATION

Type	See "Ordering information."
------	-----------------------------