PT869 1/4 (SMA)

Semi-flexible 1/4 λ whip antenna with SMA-connector

Semi-flexible 1/4 λ whip antenna with integrated SMA-connector, especially made for use on portable and stationary applications in the wireless ISM-band



ELECTRICAL SPECIFICATIONS

Frequency	860 - 870 MHz (ISM)
Bandwidth	10 MHz
Impedance	50 ohm
Vswr	< 2.0 @ f.res.
Polarisation	Vertical
Gain	0 dBd, 2.1 dBi
Max. Input Power	25 W

MECHANICAL SPECIFICATIONS

Color	Black
Height	Approx. 100 mm
Weight	10 g
Mounting Place	On transceivers and modems etc.
Materials	PE, copper, brass and Teflon
Operating Temperature	-40C to +70C
Connector	SMA-male

ORDERING INFORMATION


P/N	14340 (Antenna whip only)
P/N	14340IP (Antenna whip only - Bulk packing)

Disclaimer: Here you find all products for a complete antenna system. One-stop supplier with focus on high quality products produced in EU. No matter which type of antenna you are searching for, you will find it here. Every effort has been made to ensure the accuracy of the information in this product sheet. Scan Antenna reserves the right to introduce changes to this information without notice. All rights reserved.

PACKAGING INFORMATION

Type	Bulk or Polybag



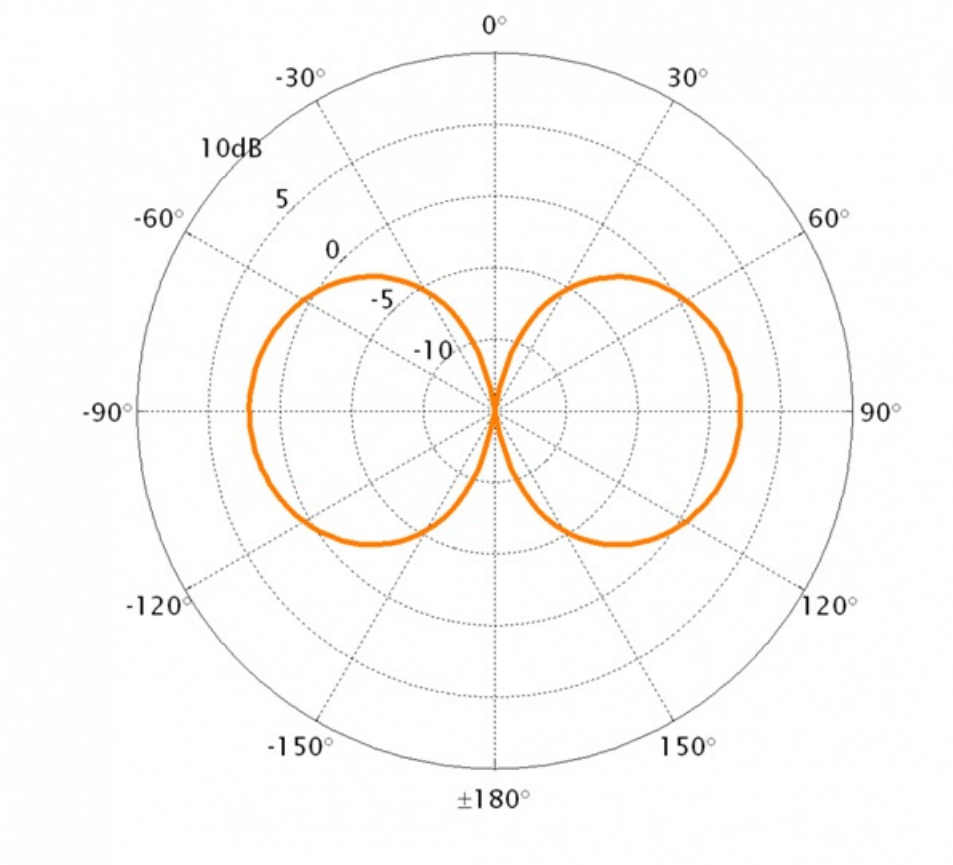

Disclaimer: Here you find all products for a complete antenna system. One-stop supplier with focus on high quality products produced in EU. No matter which type of antenna you are searching for, you will find it here. Every effort has been made to ensure the accuracy of the information in this product sheet. Scan Antenna reserves the right to introduce changes to this information without notice. All rights reserved.