

SX-MOUNT (M5/M6)

Mobile roof, trunk and wing mount

Strong and reliable universal mount for roof, trunk and wing mounting. It can be mounted from the inside as well as from the outside. It accepts antenna whips with external M5 threaded stud or with internal M6 thread (by use of the supplied M5/M6 threaded adapter)

- UNIVERSAL MOUNTING
- TILTADJUSTMENT IN ALL DIRECTIONS



ELECTRICAL SPECIFICATIONS

Frequency	0 - 1000 MHz
Impedance	50 ohm

MECHANICAL SPECIFICATIONS

Color	Black
Weight	100
Diameter	Ø 45 mm
Mounting	Bolt-on (From inside or outside)
Mounting Place	On vehicle roof, trunk or wing
Height above roof	46 mm
Mounting hole	Mounting from inside: Ø 13 mm, Mounting from outside: Ø 19 mm
Build-in Depth	Approx. 12 mm
Materials	PC, PE, brass and steel
Operating Temperature	-40C to +70C
Connector	See "ORDERING INFO" (Other types available)
Cable	See "ORDERING INFO" (Other lengths available)
Ingress protection	IP65 (When mounted)

Datasheet


2 / 5

ORDERING INFORMATION

P/N	46500 (0.1 m cable + FME-male)
P/N	46500IP (0.1 m cable + FME-male - Bulk packing)
P/N	46504 (4 m cable + open end)
P/N	46504IP (4 m cable + open end - Bulk packing)
P/N	46505 (5 m cable + open end)
P/N	46505IP (4 m cable + open end - Bulk packing)
P/N	46510 (5 m cable + FME-female + UHF-male adapter)
P/N	46510IP (5 m cable + FME-female + UHF-male adapter)
P/N	46515 (5 m cable + FME-female)
P/N	46515IP (5 m cable + FME-female - Bulk packing)
P/N	46532 (SM cable + BNC-male)

PACKAGING INFORMATION

Type	Bulk packing or individually packing in Polybag (See "Part No.")
------	--

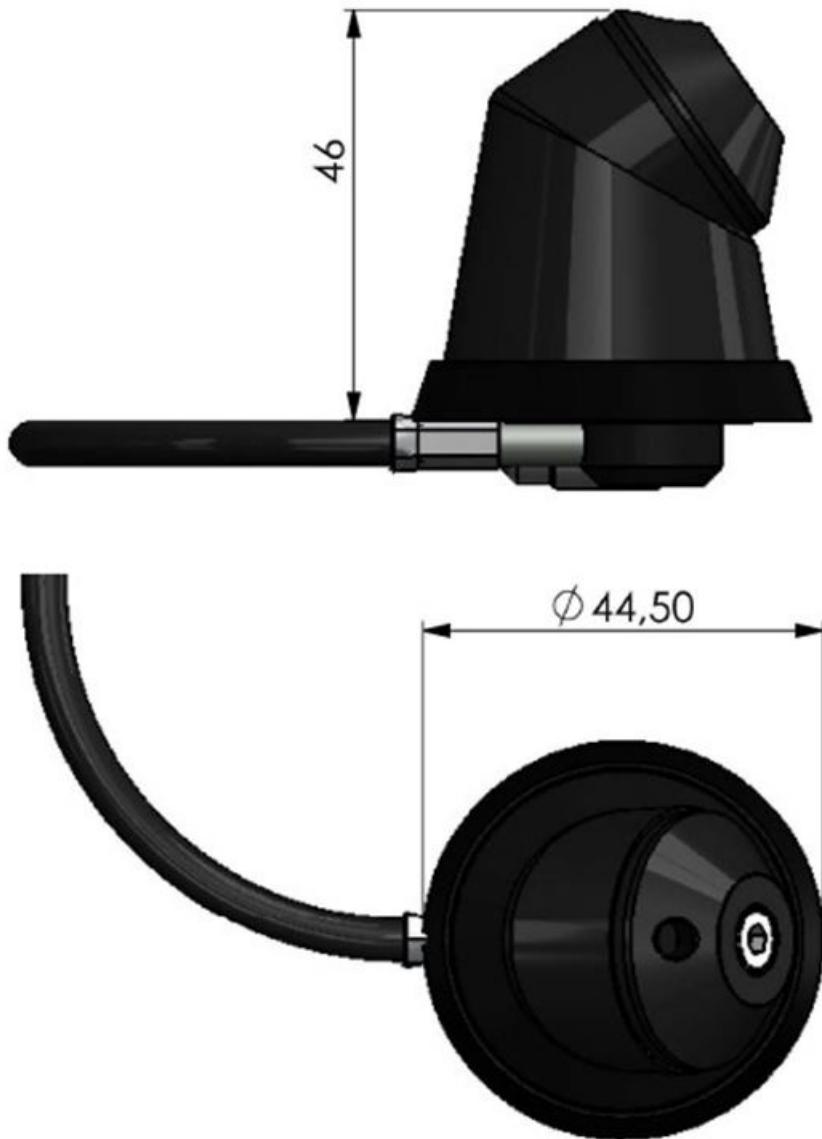

MOUNTING INSTRUCTION

