Datasheet 1 / 2


DIPLEXER 225/380 (FME)

Low profile 3-port Diplexer with FME-male connectors

Low profile low-loss 3-port diplexer with adhesive pad for easy installation

• SMD FILTER DESIGN



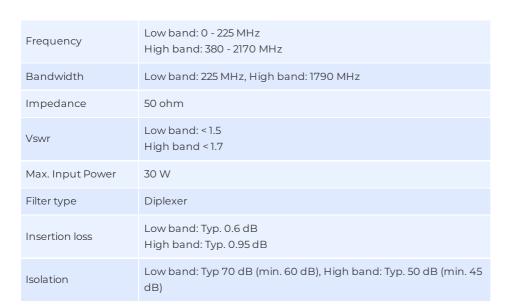

MECHANICAL SPECIFICATIONS

Color	Silver
Weight	60 g
Mounting	Adhesive pad
Mounting Place	Inside vehicle
Materials	Tin plated steel, pcb, brass, Teflon and PE
Operating Temperature	-40C to +70C
Connector	FME-male (All 3 ports)
Cable	No connection cables supplied
Dimension	80 x 45 x 20 mm
Serial no.	On product label



Printed: 10/30/2025

Datasheet

ORDERING INFORMATION

15500IP	Bulk packing
15500	Individually packing in Polybag

PACKAGING INFORMATION

