

Datasheet

1 / 2

E60-300F 0 dB (M6)


Flexible full $1/4\lambda$ spring loaded customer tunable antenna whip

Flexible spring loaded customer tunable antenna whip especially made for use with SX-Mount and Multimag on vehicle roof etc.

- CUSTOMER TUNABLE (BY CUTTING)
- [CUTTING TABLE](#) FOR TUNING SUPPLIED

ELECTRICAL SPECIFICATIONS

Frequency	60 - 300 MHz (4M-BAND)
Bandwidth	20 MHz
Impedance	50 ohm
Vswr	< 2.0
Gain	0 dBd, 2.1 dBi
Polarisation	Vertical
Max. Input Power	100 W

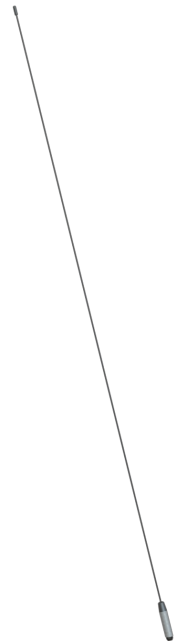

MECHANICAL SPECIFICATIONS

Color	Black
Height	Approx. 1295 mm (Before cutting)
Weight	115 g
Mounting	On "E"-type mounts
Mounting Place	Vehicle roof
Mounting Instruction	Antenna must be cut to specified frequency. Cutting Table included
Materials	Stainless steel, PE and brass
Operating Temperature	-40C to +70C
Connector	M6 Internal thread

ORDERING INFORMATION

P/N	E12208
P/N	E12208IP (Bulk packing)

SCAN ANTENNA A/S | LITERBUEN 15 | 2740 SKOVLUNDE | DENMARK | +45 +454333 1620

Disclaimer: Here you find all products for a complete antenna system. One-stop supplier with focus on high quality products produced in EU. No matter which type of antenna you are searching for, you will find it here. Every effort has been made to ensure the accuracy of the information in this product sheet. Scan Antenna reserves the right to introduce changes to this information without notice. All rights reserved.

PACKAGING INFORMATION

Type	Polybag or bulk
------	-----------------



The image shows a technical drawing of an antenna. It consists of a long, thin black rod with a coiled section at one end. A dimension line above the rod indicates a length of 1295. To the right, a smaller dimension line indicates a diameter of 15.75. The drawing is presented in a perspective view.