

Datasheet

1 / 2

E380-510 3 dB OC (M6)

Mobile tunable colinear antenna whip (380-510 MHz)

Mobile flexible customer tunable colinear antenna whip especially made for use in connection with SX-Mount and Multimagn on vehicle roof etc. [Cutting table](#) included

- CUSTOMER TUNEABLE (BY CUTTING)

ELECTRICAL SPECIFICATIONS


Frequency	380 - 510 MHz (TETRA, PMR)
Bandwidth	25 MHz
Impedance	50 ohm
Vswr	<1.5
Polarisation	Vertical
Gain	3 dBd, 5.1 dBi
Max. Input Power	50 W

MECHANICAL SPECIFICATIONS

Color	Black
Height	Approx. 675 mm (Before cutting)
Weight	70 g
Mounting	On "E"-type mounts
Mounting Place	Vehicle roof
Mounting Instruction	Tunable by cutting (Cutting table included)
Materials	Black chromed stainless steel, PE and brass
Operating Temperature	-40C to +70C
Connector	M6 Internal thread

ORDERING INFORMATION

P/N	E12252
P/N	E12252IP (Bulk packing)

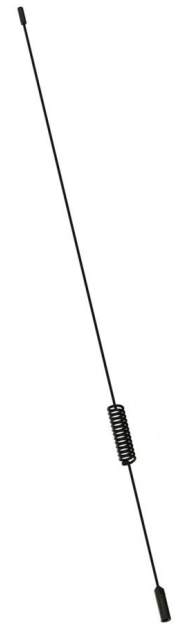

PACKAGING INFORMATION

Type	Bulk or Polybag
------	-----------------

