

G60-300 0 dB RIGID (M5)

Rigid full 1/4 λ customer tunable antenna whip (60-300 MHz)

Rigid customer tunable antenna whip especially made for use with "G"-type mounts (bases) on vehicle roof etc.


- CUSTOMER TUNABLE (BY CUTTING)
- [CUTTING TABLE](#) FOR TUNING SUPPLIED

ELECTRICAL SPECIFICATIONS

Frequency	60 - 300 MHz (4M-BAND, 2M-BAND, PMR)
Bandwidth	4M-BAND: 8 MHz, 2M-BAND: 15 MHz
Impedance	50 ohm
Vswr	< 2.0
Polarisation	Vertical
Gain	0 dBd, 2.1 dBi
Max. Input Power	200 W

MECHANICAL SPECIFICATIONS

Color	Black
Height	Approx. 1235 mm (Before cutting)
Weight	55 g
Mounting	On "G"-type mounts
Mounting Place	Vehicle roof
Mounting Instruction	Antenna must be cut to specified frequency. Cutting Table included
Materials	Stainless steel, PE and brass
Operating Temperature	-40C to +70C
Connector	M5 threaded stud

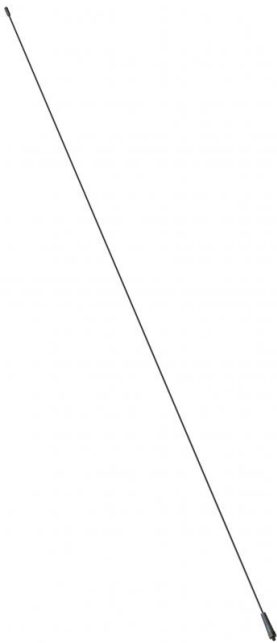

Datasheet

ORDERING INFORMATION

P/N	G12060
P/N	G12060IP (Bulk packing)

PACKAGING INFORMATION

Type	Polybag or bulk
------	-----------------

