G414 0 dB M-FLEX (M5)

Flexible full 1/4 λ Titanium antenna whip

Flexible Titanium alloy antenna whip especially made for use with G-Mount, Combisat and Unimag on vehicle roof etc.

- TITANIUM ALLOY RADIATION ELEMENT
- FACTORY TUNED TO CF = 414 MHZ

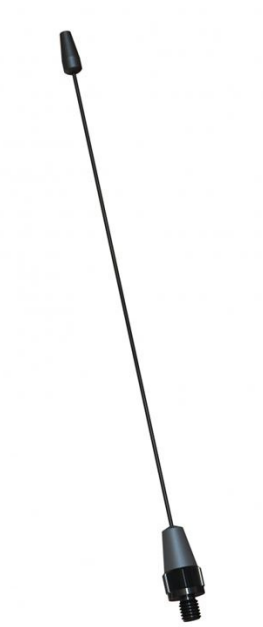

ELECTRICAL SPECIFICATIONS

Frequency	414 MHz (TETRA)
Bandwidth	50 MHz
Impedance	50 ohm
Vswr	< 1.5
Polarisation	Vertical
Gain	0 dBd, 2.1 dBi
Max. Input Power	50 W

MECHANICAL SPECIFICATIONS

Color	Black
Height	Approx. 162 mm
Weight	8 g
Mounting	On "G"-type mounts
Mounting Place	Vehicle roof
Materials	Titanium alloy, PE and brass
Operating Temperature	-40C to +70C
Connector	M5 threaded stud

ORDERING INFORMATION

P/N	G12017
P/N	G12017IP (Bulk packing)

SCAN ANTENNA A/S | LITERBUEN 15 | 2740 SKOVLUNDE | DENMARK | +45 +454333 1620
Disclaimer: Here you find all products for a complete antenna system. One-stop supplier with focus on high quality products produced in EU. No matter which type of antenna you are searching for, you will find it here. Every effort has been made to ensure the accuracy of the information in this product sheet. Scan Antenna reserves the right to introduce changes to this information without notice. All rights reserved.

PACKAGING INFORMATION

Type	Polybag or bulk

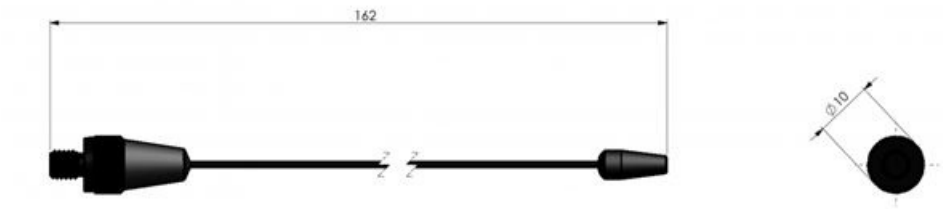

Disclaimer: Here you find all products for a complete antenna system. One-stop supplier with focus on high quality products produced in EU. No matter which type of antenna you are searching for, you will find it here. Every effort has been made to ensure the accuracy of the information in this product sheet. Scan Antenna reserves the right to introduce changes to this information without notice. All rights reserved.