PT-900 1/4 (SMA)

Semi-flexible full 1/4 λ whip antenna with SMA-connector

Semi-flexible full 1/4 λ whip antenna with integrated SMA-male connector, especially made for portable and stationary wireless applications (M2M) in the GSM900 band.



ELECTRICAL SPECIFICATIONS

Frequency	890 - 960 MHz (GSM900)
Bandwidth	70 MHz
Impedance	50 ohm
Vswr	< 2.0 @ f.res.
Polarisation	Vertical
Gain	0 dBd, 2.1 dBi
Max. Input Power	5 W

MECHANICAL SPECIFICATIONS


Color	Black
Height	100 mm
Weight	20 g
Mounting Place	On transceivers and modems etc.
Materials	PE, copper, brass and Teflon
Connector	SMA-male

ORDERING INFORMATION

14024	In Polybag
14024IP	Bulk-packing

Disclaimer: Here you find all products for a complete antenna system. One-stop supplier with focus on high quality products produced in EU. No matter which type of antenna you are searching for, you will find it here. Every effort has been made to ensure the accuracy of the information in this product sheet. Scan Antenna reserves the right to introduce changes to this information without notice. All rights reserved.



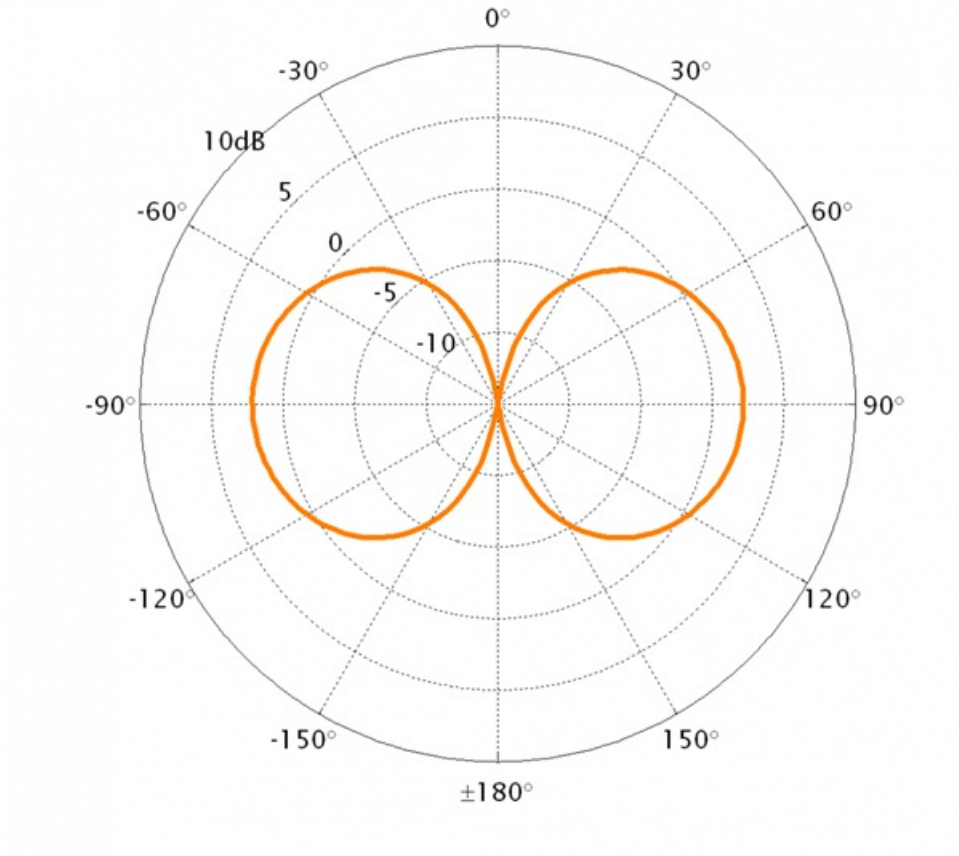

Disclaimer: Here you find all products for a complete antenna system. One-stop supplier with focus on high quality products produced in EU. No matter which type of antenna you are searching for, you will find it here. Every effort has been made to ensure the accuracy of the information in this product sheet. Scan Antenna reserves the right to introduce changes to this information without notice. All rights reserved.