
MI-26

6-Cavity 25 Watts VHF 150 MHz Miniplexer

- For use in repeaters and full duplex radios.
- Steel chassis with aluminium extruded cavities.
- High Q helical silver plated resonators.
- Easy tunning.

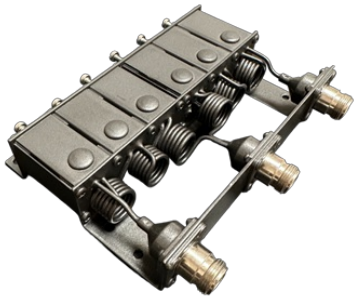

ELECTRICAL SPECIFICATIONS

Type	VHF - 6 Cavity Low Power Duplex Filter
Frequency	L: 144 - 162 MHz H: 158 - 175 MHz
Spacing	5 MHz 10 MHz
Insertion loss	≤ 1.2 dB
Isolation (Suppresion)	Single channel ≥ 80 dB
VSWR	≤ 1.5:1
Impedance	50 Ohm
Maximum Input Power	25 Watts
Frequency Stability	9 ppm/°C (approx.)

MECHANICAL SPECIFICATIONS

Color	Black Grey (RAL7021)
Dimension	135 x 156 x 33 mm
Weight	0.6 kg
Operating Temperature	-30°C to +60°C
Connector	Type-N female
Serial no.	On product label

Disclaimer: Here you find all products for a complete antenna system. One-stop supplier with focus on high quality products produced in EU. No matter which type of antenna you are searching for, you will find it here. Every effort has been made to ensure the accuracy of the information in this product sheet. Scan Antenna reserves the right to introduce changes to this information without notice. All rights reserved.

ORDERING INFORMATION

MI-262-L	L: 144 - 162 MHz, 5 MHz Not tuned
MI-260-L	L: 144 - 162 MHz, 10 MHz Not tuned
MI-262-H	H: 158 - 175 MHz, 5 MHz Not tuned
MI-260-H	H: 158 - 175 MHz, 10 MHz Not tuned

Disclaimer: Here you find all products for a complete antenna system. One-stop supplier with focus on high quality products produced in EU. No matter which type of antenna you are searching for, you will find it here. Every effort has been made to ensure the accuracy of the information in this product sheet. Scan Antenna reserves the right to introduce changes to this information without notice. All rights reserved.