

BD2-1G


VHF 0 dBd Dipole Antenna

Center Fed VHF Dipole Antenna for PMR radios, VHF Air Band and other applications.

- High quality VHF antenna for professional use
- Omni-directional radiation pattern
- No groundplane needed
- Mount included

ELECTRICAL SPECIFICATIONS

Antenna Type	Center Fed Dipole
Frequency	118 - 138 MHz, 136 - 158 MHz, 150 - 184 MHz (AIR/L/H)
Bandwidth	20 MHz , 22 MHz, 34 MHz (AIR/L/H)
Impedance	50 Ohm
VSWR	<1.5:1
Polarisation	Linear (Vertical or Horizontal)
Gain	0 dBd, 2.15 dBi
Radiation Pattern	Omnidirectional (Horizontal)
Half Power Beamwidth	E-Plane : 80° H-Plane: 360°
Max. Input Power	150 W
Antistatic Protection	Direct Ground

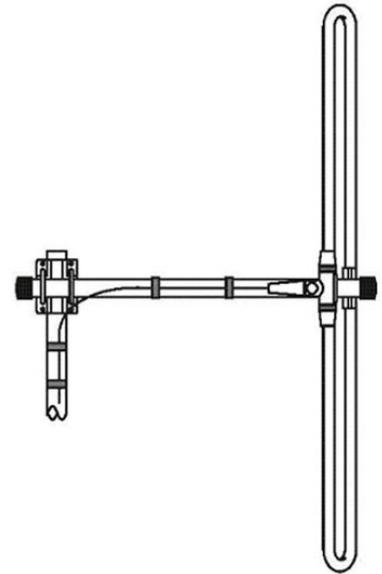

Datasheet

2 / 2

MECHANICAL SPECIFICATIONS

Color	Silvery white
Dimensions	Length: 1060 mm , 910 mm, 800 mm (AIR/L/H) Width: 600 mm
Weight	2700 g
Mount Type	Fixed Tube Mounting Bracket (included - P05/01)
Mounting Place	On Tube (∅ 27 - 60 mm, vertical or horizontal)
Materials	Corrosion-resistant Aluminum (6063-T5), Polypropylene, Copper and PE
Survival Wind Speed	50 m/s
Operating Temperature	-50 °C to +85 °C
Connector	N-female
Pigtail	Approx. 1.5 m RG213/U
Serial No.	On product label

ORDERING INFORMATION

28001-003AIR	In box (118-138 MHz)
28001-003L	In box (136-158 MHz)
28001-003H	In box (150-184 MHz)

PACKAGING INFORMATION

Type	See "Part No."
------	----------------