

BASE1304-A UHF BA Omni (Base Antenna)

3 dBd Gain Base Station Antenna for 450 MHz band

This meticulously constructed UHF 450 MHz omni-directional Base Station antenna with multipurpose mounting bracket (G1"-11 thread) antenna, can be attached directly on 10000-183 bracket.

Comes with a generous bandwidth which reduces the need for multiple antennas both in stock and on installation sites.

- High power antenna design
- No groundplane needed

ELECTRICAL SPECIFICATIONS


Frequency	380 - 400 MHz
Antenna Type	Half Wave Dipole
Impedance	50 Ohm
VSWR	<1.5:1,
Polarisation	Vertical
Gain	3 dBd, 5.1 dBi,
Radiation Pattern	Omni Directional (Horizontal)
Half Power Beamwidth	30°
Max. Input Power	300 W
Antistatic Protection	Direct Ground



Datasheet

MECHANICAL SPECIFICATIONS

Color	White and Chrome
Length	1555 mm
Weight	Max. 1.2 kg
Mount type	Directly on 10000-183 (on 1" threaded pole (G1-11 thread))
Mounting Place	On Tube (Ø 30 - 60 mm, vertical or horizontal) or Wall mount (mounting hole distance 68.5 mm).
Materials	Antenna: Brass, Copper, Fibreglass and Aluminium. Mounting Kit: Stainless steel A4 (AISI-316)
Survival Wind Speed	55 m/s
Operating Temperature	-55C to +70C (IEC 60068-2-1, IEC 60068-2-2)
Connectors	N-female
Ingress Protection	IP66
Vibration	IEC 60068-2-6, IEC 60068-2-64
Serial no.	On product label

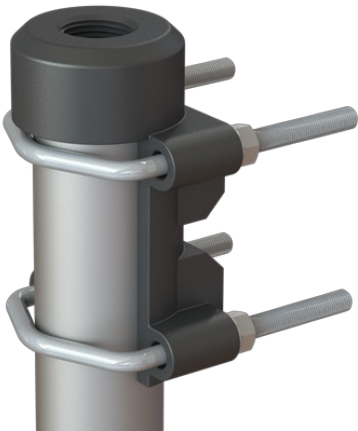

ORDERING INFORMATION

24304-005A	380-400 MHz (incl. 10000-183 bracket)
------------	---------------------------------------

PACKAGING INFORMATION

Type	See "Ordering information"
------	----------------------------